


AGE TECH. CO., LTD.

2F.,No.11 Nanyuan 2nd Rd.,Jhongli City, Taoyuan County
 320,Taiwan R.O.C..
 Tel : 886-3-433-1575 Fax : 886-3-461-3911
 http://www.age-cctv.com E-mail : service@age-cctv.com

Waterproof Infrared Illumination Camera



Model	IR-H104SN
TV System	NTSC/PAL
Pick-Up Device	1/3" SONY CCD Sensor
Total Pixels	537H x 505V (NTSC); 537 x 597 (PAL)
Effective Area	5.59mm x 4.68mm
Scanning System	525 Lines / 60 fields (NTSC); 625 Lines / 50 fields (PAL)
Frequency	Horizontal NTSC:15.734 KHz, PAL: 15.625 KHz Vertical NTSC: 60Hz, PAL: 50Hz
Sync. System	Internal
Min. Illumination	0.1 Lux color · 0 Lux with IR/F1.8
Resolution	420TV Lines
S/N Ratio	More than 50dB (AGC OFF)
Iris	A.E.S
A.E.S.	1/60 (1/50) ~ 1/100,000 sec.
Video Output	Composite 1.0 Vp-p/75 Ohm
Infrared Luminary	104 pieces IR LED, Life:6000 Hrs. Wave length:840nm
Gamma Correct	0.45
Gain Control	Auto 2dB~22dB
BLC	Auto/On/Off
Operation Temperature	-10°C to 50°C (14~122°F)
Operation Humidity	Less than 90%RH
Beam Spread Angle	40° / 35° / 30° / 20°
Illuminate Distance	60~70 M(Indoor) / 50~60M(Outdoor)
Power Supply	AC100~240V ; 850mA (max.) ; 3 W
Dimension	140(W) mm x 300(L) mm x 112(H) mm
Weight	850g

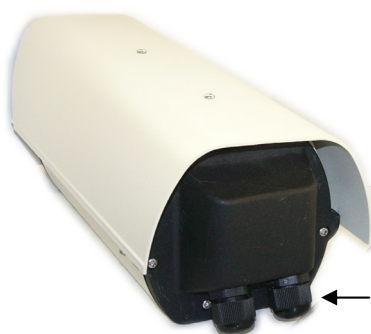

← The aperture faces down to prevent infiltrating rain.